


**MARK T. PORTER**  
*Superintendent of Schools*

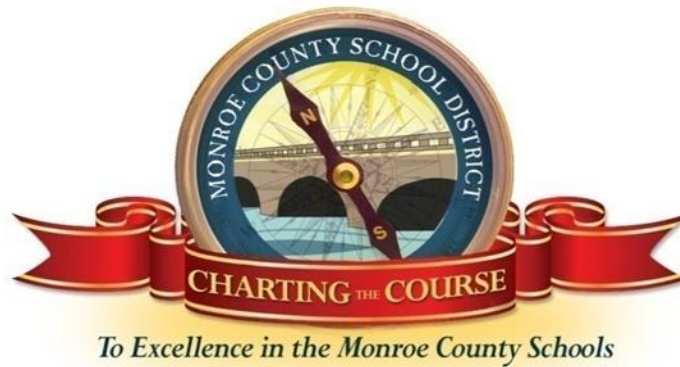

**Members of the Board**

*District # 1*  
**BOBBY HIGHSMITH**  
*Chairman*

*District # 2*  
**ANDY GRIFFITHS**

*District # 3*  
**MINDY CONN**  
*Vice-Chairman*

*District # 4*  
**JOHN R. DICK**

*District # 5*  
**RONALD A. MARTIN**

**Bid No: ITB 2019903**

**Name of Bid: Big Pine Academy Sewer Connection**

**Post Date: 9/25/18**

**Notice Post Time: 4:00 PM**

**Addendum No.2**

Due to the recent failure of the two (2) existing sewage pumps in the existing lift station behind the school, the School District has replaced both pumps with (2) new Myers WG20-21-35 with cap kits and lifting bales. The two (2) new Myers sewage pumps are to be re-used within the scope of work, therefore, no new pumps are required. Any reference to new pumps in the original bid document should be disregarded and the REQUIRED WORK section of the Price Sheet on page 13 should be edited as follows (changes in RED):

REQUIRED WORK	LUMP SUM PRICE:
Initial existing sanitary system leak testing in accordance with FCAA requirements.	
Lift Station Modifications, <del>New Pumps</del> , New Electrical Control Panel, Emergency Backup Power Connection, Valves, Valve Pit modifications.	
New 2-inch HDPE Force Main, New Service Box, FCAA street sewer connection, Pump Station and Force main startup, pump testing.	
Treatment Plant and injection well abandonment, demolition asbestos survey, and Plant Demolition.	
<b>GRAND TOTAL:</b>	